

Product Technical Sheet

T90SR

Pumped Electric Shower

Product Codes

T90SR Pumped	9kW	Satin/Chrome	XT9SRISAT9
T90SR Pumped	9kW	White/Chrome	XT9SRI953

Installation

- Left-hand side water and cable entry points

Commissioning

- Inlet connection: 15mm compression
- Outlet connection: 1/2" BSP male thread

End User

- So quiet that when the water is running you won't hear the pump
- Ideal solution for stud walls which are more susceptible to vibration & noise transmission
- Integrated pump boosts the water pressure of low- pressure gravity fed supplies
- Easy prime pump allows water flow without the need to operate the pump
- Easily replaces older T90 models - Uses the same dimensions (footprint) and fixing points
- 2 year parts and labour guarantee
- Efficient A energy rating



White/Chrome



T90SR Satin/Chrome



T90SR

Pumped Electric Shower

Shower

Temperature Control	Pumped electric stabilised
Power Ratings	9kW (230v)
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, back (left hand side of unit)
Cable Entry Points	Top, bottom, back (left hand side of unit)
Outlet Connection	1/2" BSP
Plumbing System	Gravity Fed Cold Water Supply
Minimum Head Pressure	80mm
Maximum Head Pressure	10m
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI Kitemark, IP25, Quiet Mark
Guarantee	2 years

Diagram Key:

 **Water Entry Points**


 **Cable Entry Points**

Dimensions:

H: **266mm**

W: **322mm**

D: **95mm**

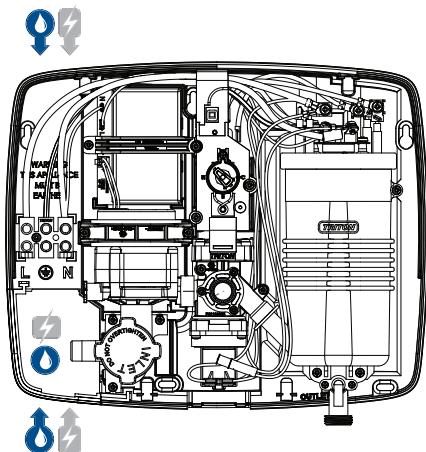

Riser Rail Kit

Length	530mm
Diameter	22mm
Material	double interlocked Stainless Steel
Finish	Polished Chrome
Hose	1.25m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing with specified Triton accessories will aid optimum performance and keep the unit within the allocated guarantee period



Lucas Curved Riser Rail

8000 Series Pump Shower Head
(5 Spray Pattern)

Contact our specification team

Call: 01 628 6845 | Email: sales@earthridge.ie | Web: www.tritonshowers.ie