

Mira Vigour Thermostatic Electric Shower



Enjoy instant invigoration combined with thermostatic safety, even at low pressure with Mira Vigour Thermostatic.



Product Information

Description	Colour	Product No.
Mira Vigour Thermostatic	White/Chrome	1.1532.353

Features & Benefits

Temperature control

Thermostatic temperature control for safer showering

Easy to fit

Easy to install and simple to clean

Easy to service

No need to prime

Removable filters

Removable check valves

For your customer

Separate flow and temperature controls help you fine tune your perfect shower

Push button on/off

Suited to homes with a low pressure water systems and plentiful supply of hot water

Phased shutdown flushes hot water from the tank making it safe for the next user

Large 4 spray showerhead with rub-clean nozzles

To download other resources, and for more information and advice on our products just visit:
www.mirashowers.co.uk

Product Specification

Tech Details

Temperature Control

Thermostatic

Installation

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal Block connections: Maximum 2.5mm²

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: 1/2" BSP Male

Cistern: Minimum 230 litres

Supply Conditions (hot and cold)

Cold water range: Up to 25°C

Hot water range: 55°C - 65°C

Minimum maintained pressure: 0.008 bar (80mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

Performance

Temperature stability: ± 6°C

Flow rate: up to 14 l/min

Safety Features

Phased shutdown: Yes

Factory set to safe max temp: Yes

Accessories


Wide range of accessories available at www.mirashowers.co.uk

Approvals

Energy Efficiency: Class A



Dimensions

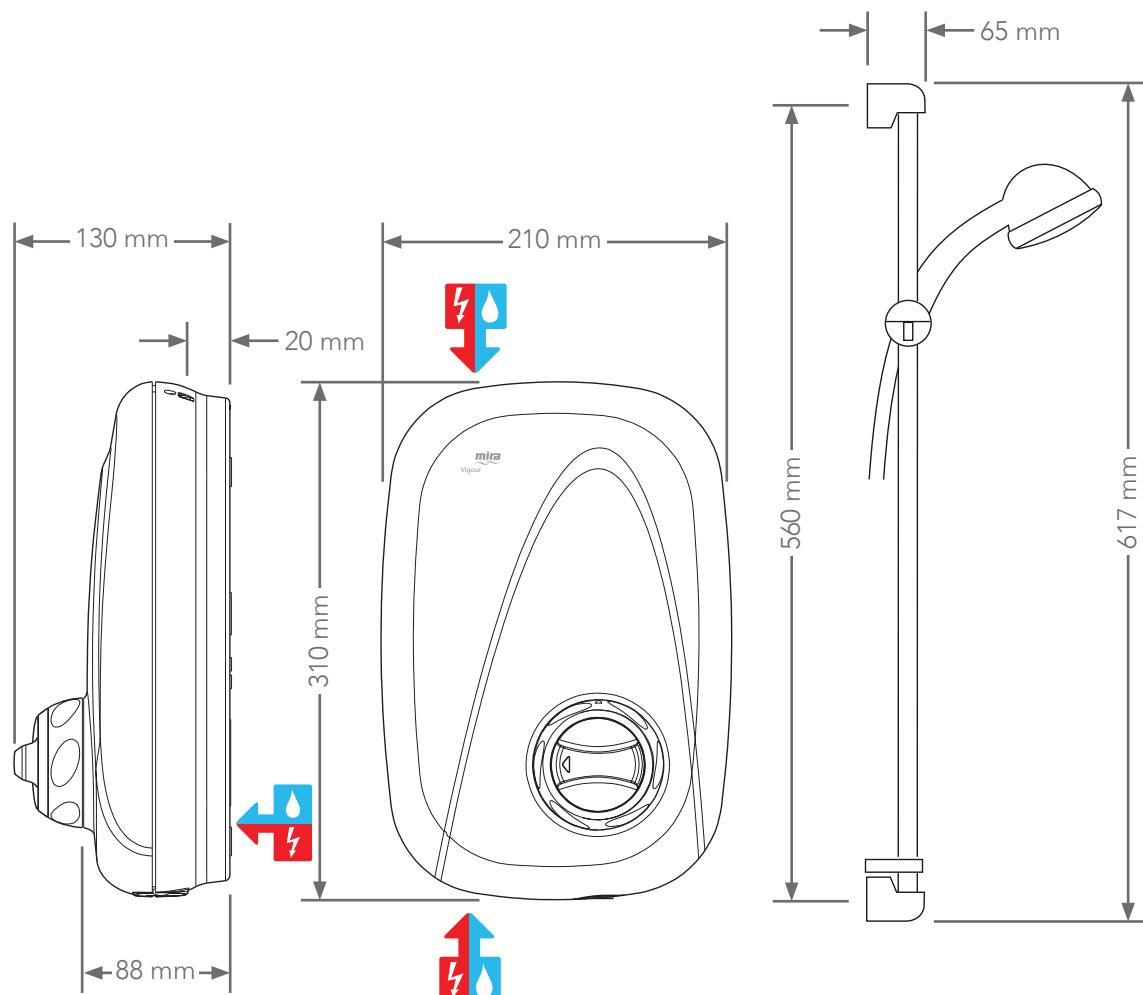

To download other resources, and for more information and advice on our products just visit:
www.mirashowers.co.uk

mira
SHOWERS